

21.5" Full Outdoor Digital Signage Monitor

Key Features


High brightness 5000nits
 Sunlight Readable
 LED Backlight
 Wide Viewing Angle of 178°(H), 178°(V)
 Wide Operation Temperature (-20 °C~70°C)
 LCD Blacking Defect Free
 Low Power Consumption
 BL MTBF: 50,000 hours



Specifications

Model Name	RS215FHB-GE15
Screen Size	21.5"
Display Area (mm)	477.06(H) x268.79(V)
Brightness	1000 to 5000nits
Resolution	1920x1080
Aspect Ratio	16 : 9
Contrast Ratio	1000 : 1
Viewing Angle	89/89/89/89 (Min.)(CR≥10)
Color Saturation (NTSC)	67%
Display Colors	16.7M
Response Time (Typical)	6 (Typ.)(Tr/Td) (ms)
Input Interface	USB TOUCH*1 HDMI IN*1 AC IN*1
OSD Key	IR Remote Control
Brightness Adjust	Light sensor
Speaker	5W
Glass	5MM Tempered Glass OCR
Touch Type	EETI PCAP
Input Power	100 ~ 264VAC 141 ~ 370VDC
Power Consumption	60W
Radiator System	Intelligent temperature-controlled cooling system
Dimensions (mm)	541 x 322.8 x 57mm
Mounting	200x200mm Screws metric M6
Weight (Net)	TBD
IP Grade	IP65
Operating Temperature	-20 ° C ~ 60 ° C
Storage Temperature	-20 ° C ~ 70 ° C

The information described in this specification is preliminary and can be changed without prior notice.

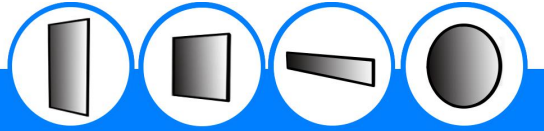

Mechanical Drawing

Unit:mm

