42" Full Outdoor Monitor

Key Features

- LED Backlight
- Sunlight Readable
- High brightness2000nits
- BL MTBF: 50,000 hours
- Low Power Consumption
- Protection level Ip66 Front
- LCD Blacking Defect Free
- Wide Viewing Angle of 178°(H), 178°(V)
- Wide Operation Temperature (-20 °C~70°C)
- The light sensor automatically adjusts the brightness

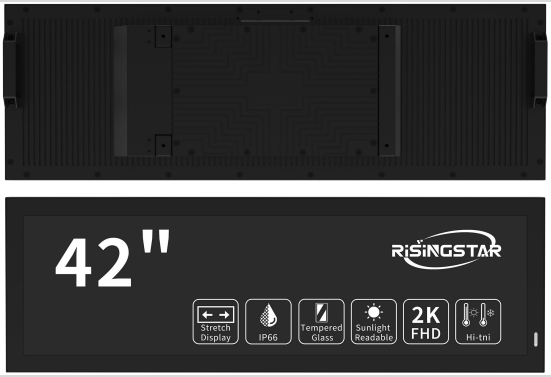

Specifications

Model Name	RS420LNX01		
Screen Size	42"		
Display Area (mm)	1039.68(H)×259.92(V) mm		
Dimensions (mm)	1111.6(H)×334(V)×88.8(D) mm		
Brightness	2000 cd/m^2		
Resolution	1920 x 480		
Aspect Ratio	>3 : 1		
Contrast Ratio	4000 : 1		
Response Time (Typical)	8(Typ.)(Tr/Td) (ms)		
Viewing Angle	89/89/89/89 (Min.)(CR≥10)		
Display Colors	16.7M/1.07B		
Glass	Tempered Glass, AR or AG (optional), OCR optical bonding		
Touch Type	N/A		
Input Power	AC 100~240V		
Power Consumption	TBD		
Radiator System	Passive heat dissipation without fan		
Mounting	400x200mm 4-M8		
Weight (Net)	TBD		
IP（Ingress Protection）	IP66		
Operating Temperature	-20 ℃~70 ℃		
Storage Temperature	-25 ℃~ 80 ℃		
OS	Android	windows	Monitor
Input Interface	AC IN HDMI*1 RJ45*1 USB*2 (optional ,2 pcs max)	AC IN HDMI*2 RJ45*2 USB*2 (optional ,2 pcs max)	AC IN HDMI*1

The information described in this specification is preliminary and can be changed without prior notice.

Outline Dimensions

Mechanical Drawing **Unit: mm**

