58.4" BAR LCD SECREEN

Key Features

- LED Backlight
- Sunlight Readable
- High brightness1000nits
- BL MTBF: 50,000 hours
- Low Power Consumption
- Protection level Ip66 Front
- LCD Blacking Defect Free
- Wide Viewing Angle of 178°(H), 178°(V)
- Wide Operation Temperature (-20 °C~70°C)
- The light sensor automatically adjusts the brightness

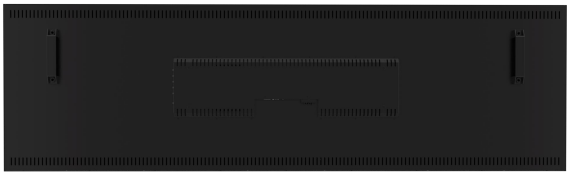



Specifications

Model Name	**RS584LNX01**		
Screen Size	58.4"		
Display Area (mm)	1428.48(H)×401.76(V) mm		
Dimensions (mm)	1458.6(H)×431.6(V)×61(D)mm		
Brightness	1000 cd/m^2		
Resolution	3840 x 1080		
Aspect Ratio	32 : 9		
Contrast Ratio	4000 : 1		
Response Time (Typical)	8(Typ.)(Tr/Td) (ms)		
Viewing Angle	89/89/89/89 (Min.)(CR≥10)		
Display Colors	1.07 B		
Glass	Tempered Glass, AR or AG (optional), OCR optical bonding		
Touch Type	N/A		
Input Power	AC 100~240V		
Power Consumption	TBD		
Radiator System	Active heat dissipation without fan		
Mounting	500x100mm 4-M8		
Weight (Net)	TBD		
IP（Ingress Protection）	IP66		
Operating Temperature	-20°C~70°C		
Storage Temperature	-25°C~ 80°C		
OS	Android	windows	Monitor
Input Interface	AC IN	AC IN	AC IN
	USB*2 HDMI*1 RJ45*1 EARPHONE OUT*1 TF*1	HDMI*2 RS232*1 USB*2 RJ45*2	HDMI*2 USB*1

The information described in this specification is preliminary and can be changed without prior notice.

Outline Dimensions

Mechanical Drawing **Unit: mm**

