32" Full Outdoor Monitor

Key Features

- High brightness 3000nits
- Sunlight Readable
- LED Backlight
- Wide Viewing Angle of 178°(H), 178°(V)
- Wide Operation Temperature (-20˚C~70˚C)
- LCD Blacking Defect Free
- Low Power Consumption
- BL MTBF: 50,000 hours
- Intelligent temperature control system, active heat dissipation



Specifications


Model Name	RS320HNX02-D01-BK
Screen Size	32"
Display Area (mm)	698.4(H)×392.85(V) mm
Brightness	3000 cd/m^2
Resolution	1920 x 1080
Aspect Ratio	16 : 9
Contrast Ratio	1300 : 1
Response Time (Typical)	6(Typ.)(Tr/Td) (ms)
Viewing Angle	89/89/89/89 (Min.)(CR≥10)
Display Colors	16.7M
OS	Monitor
Glass	4+0.76+4MM Tempered Glass OCR(IK10)
Touch Type	N/A
Input Power	AC 100~240V
Power Consumption	170W(.typ)
Radiator System	Passive heat dissipation without fan
Input Interface	HDMI*1 AC IN*1 VGA*1 DVI*1
Dimensions (mm)	770.5*465.5*90.5 mm
Mounting	200x400mm Screws metric M8
Weight (Net)	28.5kg
IP（Ingress Protection）	IP65 or IP66
Operating Temperature	-20 ℃~70 ℃
Storage Temperature	-20 ℃~ 70 ℃


The information described in this specification is preliminary and can be changed without prior notic.


Outline Dimensions

Mechanical D

Unit: mm

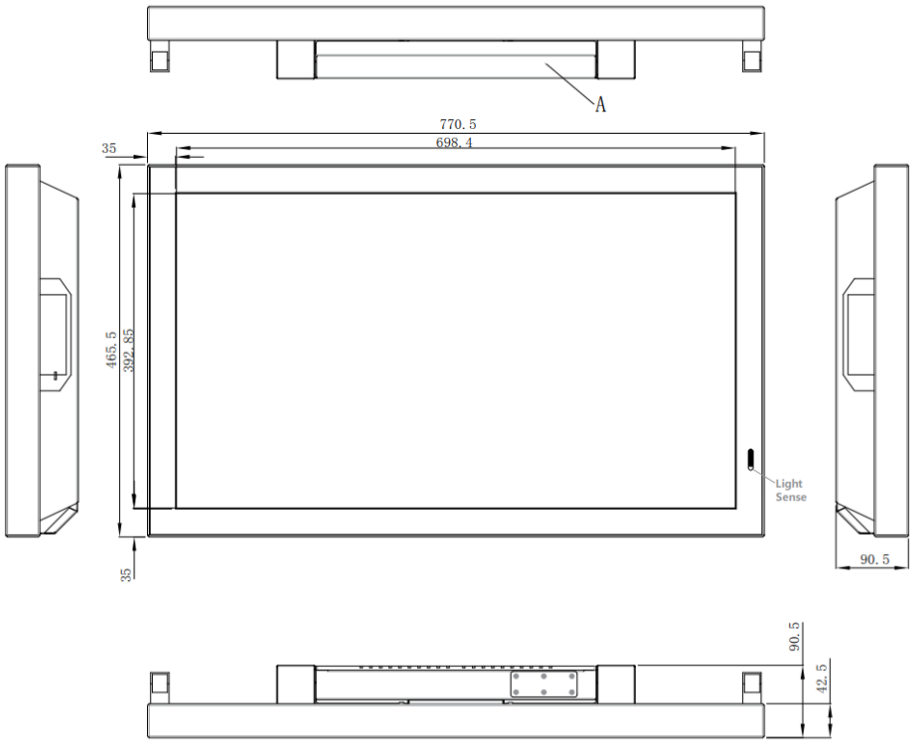

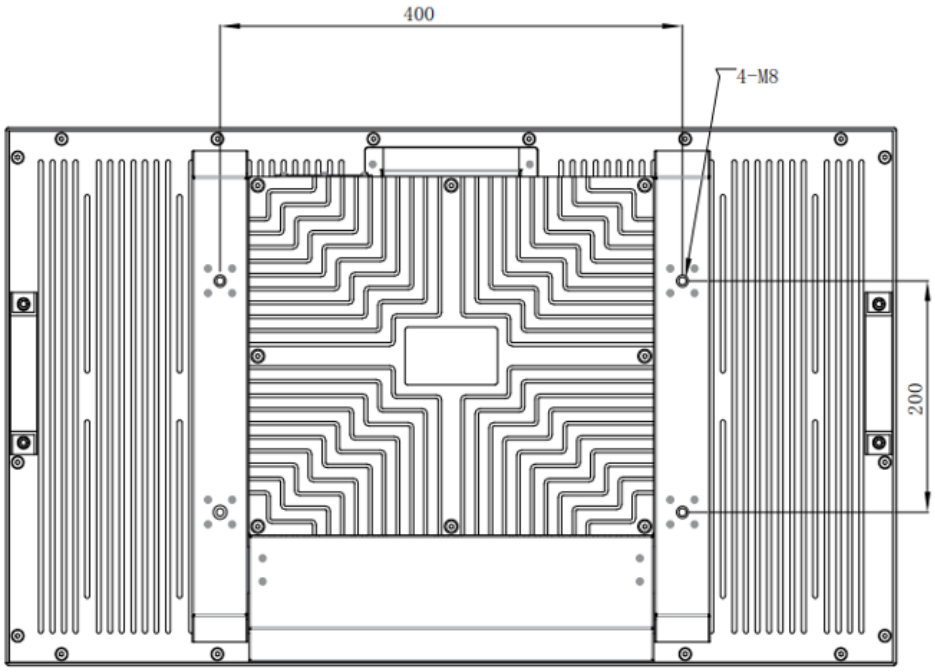

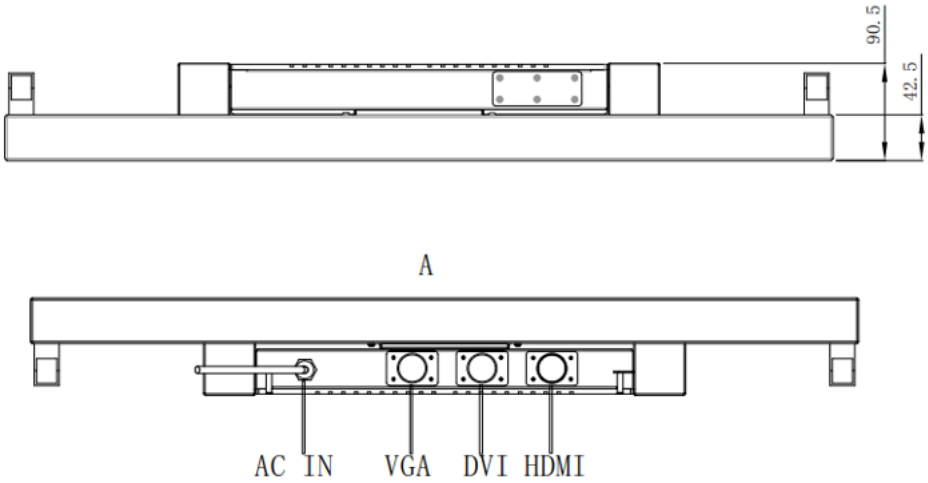
90.5
42.5
A
AC IN
VGA
DVI
HDMI